

## REL-70 SERIES OPERATING INSTRUCTIONS

**INPUT RATING:** 100-240VAC, 1.6 A, 50-60 Hz.

**OUTPUT RATING:** 70 Watts Maximum Total Continuous Output Power with 300 LFM Forced Air.  
50 Watts Maximum Total Continuous Output Power Convection Cooled.  
40 Watts Maximum Total Continuous Output Power Convection Cooled with Chassis and Cover.

**MODEL LISTING:**


Model	Output 1	Output 2	Output 3	Output 4
REL-70-4001	+3.3VDC/6A	+5VDC/5A	+12VDC/2A(1)	-12VDC/2A(1)
REL-70-4002	+5VDC/6A	+3.3VDC/5A	+12VDC/2A(1)	-12VDC/2A(1)
REL-70-4003	+5VDC/6A	+3.3VDC/5A	+15VDC/2A(1)	-15VDC/2A(1)
REL-70-4004	+5VDC/6A	-5VDC/5A	+12VDC/2A(1)	-12VDC/2A(1)
REL-70-4005	+5VDC/6A	-5VDC/5A	+15VDC/2A(1)	-15VDC/2A(1)
REL-70-4006	+5VDC/6A	+24VDC/2A	+12VDC/2A(1)	-12VDC/2A(1)
REL-70-4007	+5VDC/6A	+24VDC/2A	+15VDC/2A(1)	-15VDC/2A(1)
REL-70-4009	6.7VDC/6A	5VDC/4A	+15VDC/2A	-15VDC/2A
REL-70-4010	+7.5VDC/3A	-7.5VDC/2A	+12VDC/2A(1)	12VDC/2A
REL-70-3001	+5VDC/6A	+12VDC/3A	----	-12VDC/3A
REL-70-3002	+5VDC/6A	+15VDC/3A	----	-15VDC/2A
REL-70-3003	+5.1VDC/6A	+7.5VDC/2A	----	-7.5VDC/2A
REL-70-3004	+3.3VDC/6A	+7VDC/5A	+12VDC/2A	----
REL-70-3005	+5VDC/5A	18VDC/2A	----	18VDC/2A
REL-70-2001	+3.3VDC/6A	+5VDC/5A	----	----
REL-70-2002	+5VDC/6A	+12VDC/3A	----	----
REL-70-2003	+5VDC/6A	+24VDC/2A	----	----
REL-70-2004	+12VDC/3A	-12VDC/3A	----	----
REL-70-2005	+15VDC/3A	-15VDC/2A	----	----
REL-70-2006	+5VDC/6A	-5VDC/5A	----	----
REL-70-1001	2.5VDC/14A	----	----	----
REL-70-1002	3.3VDC/14A	----	----	----
REL-70-1003	5VDC/14A	----	----	----
REL-70-1004	12VDC/5.8A	----	----	----
REL-70-1005	15VDC/4.7A	----	----	----
REL-70-1006	24VDC/2.9A	----	----	----
REL-70-1007	28VDC/2.5A	----	----	----
REL-70-1008	48VDC/1.5A	----	----	----

**NOTES:**

- Rated 1.5 Amps with convection cooling.
- A suffix may be added to the model number to indicate the following optional configurations: (CH-chassis, CO-cover, IO-isolated outputs, TS-terminal strip).

**CLASSIFICATION:**

- Protection against electric shock – Class I.
- Protection against harmful ingress of water – IPX0 (Non-protected), ordinary.
- Methods of sterilization – None.
- Suitability for use in an oxygen rich environment – End user responsibility, not evaluated.
- Mode of operation – Continuous.

<b>CE</b>	<b><u>DECLARATION OF CONFORMITY</u></b>	<b>12</b>
<p>Manufacturer: Integrated Power Designs, Inc.          Manufacturer's Address: 300 Stewart Road, Wilkes-Barre, PA 18706 USA</p> <p>Declare that all models listed above including all options are in conformity with the applicable requirements of:</p> <p style="text-align: center;"><b>EN 60950-1/A1:2010 Information Technology Equipment. General Requirements</b></p> <p>following the provisions of the Low Voltage Directive:</p> <p style="text-align: center;"><b>2006/95/EC of 12 December 2006.</b></p> <p>In addition, all models are Certified to be in compliance with applicable requirements of UL 60950-1 2nd Edition, UL 60601-1 1st Edition, ANSI/AAMI ES60601-1:2005, IEC 60950-1/A1:2009, IEC 60601-1:1988+A1:1991 +A2:1995 and IEC 60601-1:2005 including all EU national deviations, CAN/CSA-C22.2 No. 60950-1-07, CAN/CSA-C22.2 No. 601-1-M90, CAN/CSA-C22.2 No. 60601-1:2008, EN60950-1/A1:2010, EN 60601-1/A2:1995 and EN 60601-1:2006.</p>		
<p><b>BY:</b> Steven Thompson- President  </p> <p><b>PLACE:</b> Integrated Power Designs          300 Stewart Road, Wilkes-Barre, PA 18706 USA</p> <p><b>DATE:</b> April 27, 2012</p>		<p><b>EUROPEAN CONTACT:</b>          Compumess Elektronik GmbH          Lise-Meitner-Strasse 1          85716 Unterschleißheim          Telephone (089) 32 15 01-0</p>

## REL-70 SERIES OPERATING INSTRUCTIONS

**WARNING!  
RISK OF FIRE!**

An open internal fuse indicates a catastrophic failure of circuit component(s). Repair must be by authorized IPD personnel only. Refer to fuse rating on power supply circuit board for rating.

**WARNING!  
SHOCK HAZARD!**

Dangerous voltages are present on some components, printed circuit board traces and heatsinks.

**INPUT FUSE:**

This product includes a single fuse in the phase lead only. In consideration of 8.11.5 of IEC 60601-1:2005, a second fuse may be required in the neutral lead of the end use equipment

**SEPERATION:**

Primary to secondary creepage distance is 8mm minimum, clearance 5mm minimum (2MOOP). Primary to ground creepage distance is 4mm minimum, clearance 2.5mm minimum (1MOOP). Secondary to ground creepage is 2.3mm minimum, clearance is 1.4mm minimum (Operational Insulation). The required seperation must be maintained in the end use equipment to preserve the established means of protection.

**OUTPUTS:**

The outputs are not acceptable for patient connection without additional isolation. All outputs are SELV under normal and single fault conditions unless otherwise indicated.

**TEMPERATURES:**

The maximum operating temperatures of safety components as defined in the applicable safety standards must not be exceeded after installation in the end use equipment. Output power, ambient air temperature and convection or forced air cooling availability should be considered in the end use equipment.

**HIPOT:**

In consideration of IEC 60601:2005 Clause 8.8.3, care must be taken to insure the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Breakdown of basic insulation and catastrophic failure of the power supply may result if a test voltage of greater than 1800 VAC is applied between primary and secondary circuits. Each isolating component is factory tested at 4000 VAC minimum prior to installation. Primary and secondary to ground capacitors may need to be disconnected prior to performing a dielectric strength test on the power supply or the end product.

**INSTALLATION:**


The power supplies included in model listing on reverse side are considered components intended for professional installation into end use equipment. The protective earth (ground) terminal must be bonded to protective earth in the end use equipment.

**EMISSIONS:**

This product was tested for compliance with EN 55022 and EN 55011 Class B conducted and radiated emissions using the techniques listed below and non-inductive load resistors to simulate operation in a typical installation. All or a combination of the following requirements may be necessary to insure compliance in the end use equipment.

1. Installation of the power supply, output cables and loads in a shielded enclosure.
2. Use of optional chassis and cover.
3. Use of shielded I/O cables.
4. Use of ferrite beads on I/O cables.
5. Grounded output returns.

**CONNECTIONS /  
DIMENSIONS:**

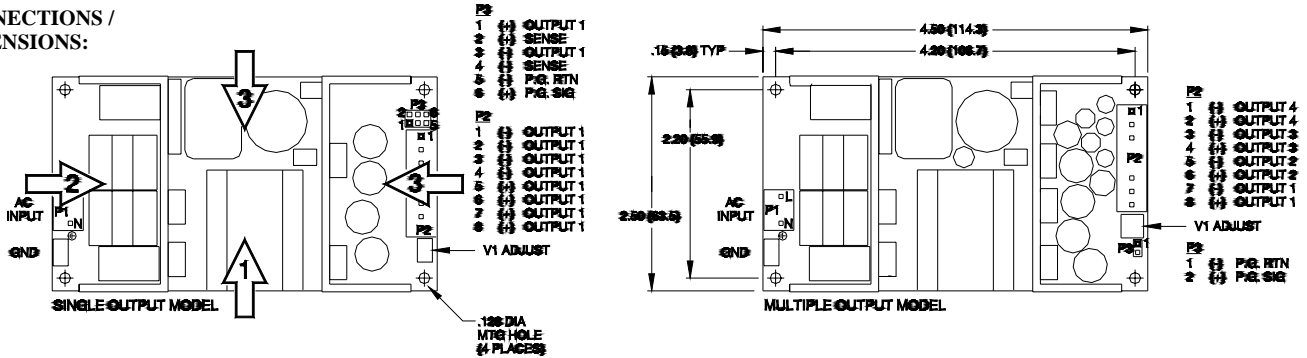

**AIR FLOW  
DIRECTION:**

1. Recommended
2. Good
3. Fair

**CONNECTORS:**

- P1: AC Input – 0.156 inch friction lock header mates with Tyco 640250-3 or equivalent crimp terminal housing with Tyco 3-640706-1 or equivalent crimp terminal.
- P2: DC Output (Single and Multiple Output) – 0.156 inch friction lock header mates with Tyco 770849-8 or equivalent crimp terminal housing with Tyco 3-640707-1 or equivalent crimp terminal.
- G: Protective Earth (Ground) – 0.187 quick disconnect terminal.
- P3: Power Fail / Sense (Single Output) – 0.100 breakaway header mates with Molex 22-55-2061 or equivalent crimp terminal housing with Molex type 71851 or equivalent crimp terminal.
- P3: Power Fail (Multiple Output) - 0.100 breakaway header mates with Molex 50-57-9002 or equivalent crimp terminal housing with Molex type 71851 or equivalent crimp terminal.